




PRO1 SPECIFICATIONS SHEET



MODEL T755WHO

Wireless Universal

- Up to 2-Heat 2-Cool Conventional
- Up to 4-Heat 2-Cool Heat Pump
- Battery or Hardwire
- 7 Day, 5/1/1 or Non-Programmable
- Humidity Control
- Occupancy Control

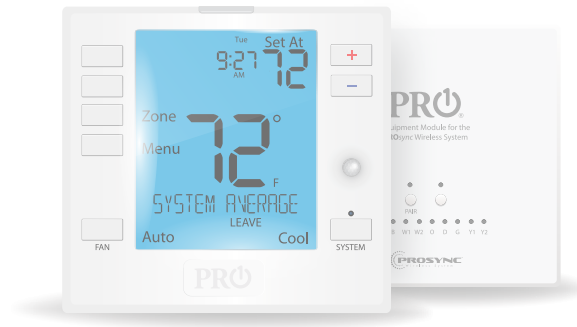

This model features:

- 7 sq. inch display
- Blue backlight
- Glow in the dark light button
- Easy access battery compartment
- Universal subbase
- Simple private label badge system
- Setpoint limits
- Electric or gas configurable
- Mounts on wall or junction box
- Auto-changeover
- PTAC capable
- 5 year warranty
- 5 minute compressor delay protection (selectable on or off)
- Customizable staging logic
- Separate heating and cooling swing (cycle rate) adjustments
- Battery or 24V power
- Room temperature calibration adjustments
- Easy wire color-coded terminal blocks
- Three speed fan

Specifications:

Frequency	916 MHz
Application	Up to 2-Heat 2-Cool Conventional, 4-Heat 2-Cool Heat Pump
Programmability	7-Day, 5/1/1 or Non-Programmable
System Switch	Cool - Off - Heat - Auto
Display Range	41°F to 95°F (5°C to 35°C)
Control Range	44°F to 90°F (7°C to 32°C)
Display Accuracy	+/- 1°F
Heat Swing	Adjustable from 0.2°F to 2.0°F
Cool Swing	Adjustable from 0.2°F to 2.0°F
Terminals	Rc, Rh, G, Y, Y2, C, O, B, W/E, W2, H, D
Load Rating	1 amp per terminal, 1.5 amp maximum all terminals combined
Power Source	18 to 30 VAC, NEC Class II, 50/60 Hz for hardwire (common wire) Battery power from 2 AA Alkaline batteries
Operating Ambient	32°F to +105°F (0°C to +41°C)
Operating Humidity	90% non-condensing maximum
Mounting	Wall or Junction Box
Dimensions	4.7"W x 4.4"H x 0.8"D (119mm W x 112mm H x 20mm D)
Warranty	5 year warranty